

SERIES LB-25, 40, 75, 215 & 315

EFFLUENT PUMP



Datasheet

Features
Performance Curves

Up to
72 ft.

Head

Up to
175
US GPM

Flow

1 HP

Horsepower

200°F

Max.
Temperature

DURABLE OUTER HOUSING

The outer housing made of 304 stainless steel provides impact resistant to harsh handling and conditions.

MOTOR PROTECTOR

The motor incorporates a miniature thermal protector which protects against overheating and dry-run.

SUBMERSIBLE MOTOR

Air filled motor, housed in a watertight casing, conforms to Class F insulation.

STAINLESS STEEL 304 MOTOR HOUSING

The material provides superior corrosion resistance.

C3 BALL BEARINGS AND HARDENED SS SHAFT

High quality of C3 ball bearings and the well-balanced, hardened stainless steel shaft enhance stability during continuous pumping operations.


MECHANICAL SEAL

The motor incorporates a miniature thermal protector which protects against overheating and dry-run.

IMPACT-RESISTANT NYLON PUMP CASING AND SUCTION GRID

Air filled motor, housed in a watertight casing, conforms to Class F insulation.

Performance Curves

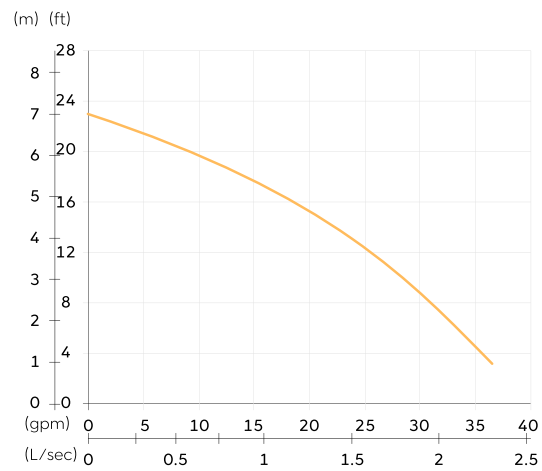

Dimensions

DIMENSIONS		
A	438 mm	17.2 in
B	388 mm	15.3 in
C	-	-
D	96 mm	3.8 in
E	281 mm	11 in
F	198 mm	7.8 in

